




STEAM MASTER 15-30 / 19,5 / 30 KW SH

PAROGENERATOR
STEAM GENERATOR



1 izlaz sa funkcijom deterdženta
1 output with detergent function

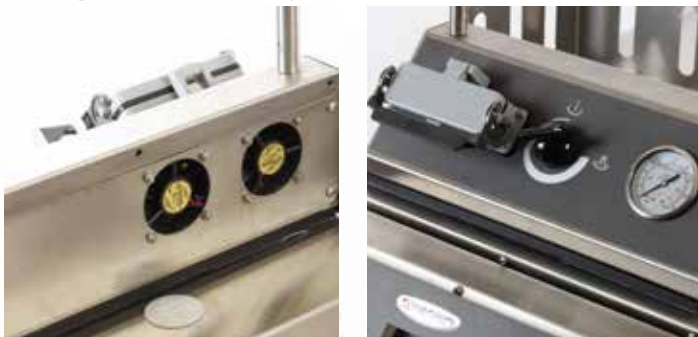

Kod proizvoda	KW	Volt-Hz	A
Q80001972	15-30	400-50 3 faze	44

Kod proizvoda	KW	Volt-Hz	A
Q80001866	19,5	208-60 3 faze	53
080006153	19,5	400-50 3 faze	27
Q80001879	19,5	480-60 3 faze	25

Kod proizvoda	KW	Volt-Hz	A
080006154	30	400-50 3 faze	44
Q80001880	30	480-60 3 faze	40

Specifikacija	Specification	Jedinica mere Measure units	STEAM MASTER 15-30 KW SH	STEAM MASTER 19,5 KW SH	STEAM MASTER 30 KW SH
vreme pokretanja	start up time	min	5,5	8	5,5
zapremina bojlera	boiler capacity	litar/gallon	16/4,23	16/4,23	16/4,23
materijal bojlera	boiler material	vrsta	inox AISI 304	inox AISI 304	inox AISI 304
snaga bojlera	boiler power	kW	15-30	19,5	30
proizvodnja pare	steam production	g/min	380-680	480	680
regulacija izlaska pare	steam output regulation	vrsta	ručno	ručno	ručno
radni pritisak	working pressure	bar/psi	10-11/x145-160	10,5/152	11/160
temperatura pare u bojleru	steam temp. in boiler	°C/°F	185-190/365-374	185/365	190/374
izlaz vode	water output	da/ne	ne	ne	ne
izlaz deterdženta	detergent output	da/ne	da	da	da
rezervoar za vodu	water tank capacity	litar/gallon	25/6,60	25/6,60	25/6,60
neograničena autonomija	unlimited autonomy	da/ne	da	da	da
rezervoar za deterdžent	detergent tank capacity	litar/gallon	5/1,32	5/1,32	5/1,32
materijal kućišta	body material	vrsta	inox	inox	inox
neto težina	weight net	kg/lbs	128/282	116/256	128/282
dimenzije uređaja	dimension	d x š x v cm	95x49x97	95x49x97	95x49x97
dimenzije pakovanja	packaging dimension	d x š x v cm	115x61x115	115x61x115	115x61x115
težina pakovanja	packaging weight	kg/lbs	168,5/372	157/346	168,5/372
kutija pakovanja	packaging box	vrsta	drvena	drvena	drvena

uključeni dodaci za:

208 V - code Q80001866

480 V - code Q80001879

480 V - code Q80001880

> pogledaj tabelu 4

dodaci koji NISU uključeni:

400 V - code Q80001972

400 V - code 080006153

400 V - code 080006154

> pogledaj tabele 1-2-3-5

accessories included for:

208 V - code Q80001866

480 V - code Q80001879

480 V - code Q80001880

> see table 4

accessories NOT included for:

400 V - code Q80001972

400 V - code 080006153

400 V - code 080006154

> see tables 1-2-3-5

